


CTL-SF-GEMT

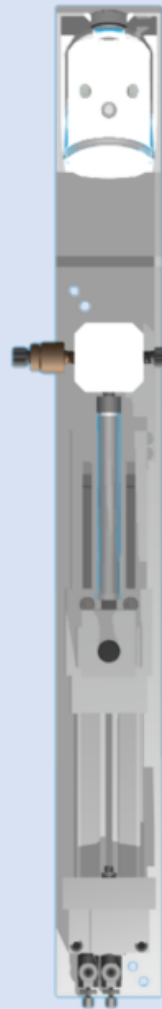

Dimensions (mm)	72 (W) x 106 (H) x 460 (L)
Compatible syringes	-25 → Hamilton 81460, 2.5 mL -50 → Hamilton 81560, 5.0 mL
Syringe actuator	Pneumatic, 22-116 psi
Valve path	3-way
Valve wetted materials	PTFE
Valve seal material	FKM
Valve Orifice diameter	1.6 mm
Valve actuation type	Pneumatic
Valve actuation range	40-60 psi
Valve max pressure	450 psi
Valve ports	¼-28 UNF

Stracotek reserves the right to change, add, suspend, cancel, remove or otherwise modify the products offered on this brochure at any time without prior notice or obligation.